



RCA-34

SUPER-CONTROL R-F AMPLIFIER PENTODE

Filament	Coated	
Voltage	2.0	d-c volts
Current	0.060	amp.
Direct Interelectrode Capacitances:		
Grid to Plate (with shield-can)	0.015 max.	μf
Input	6.0	μf
Output	11.5	μf
Overall Length	4-25/32" to 5-1/32"	
Maximum Diameter	1-13/16"	
Bulb	ST-14	
Cap	Small Metal	
Base	Medium 4-Pin	
Pin 1-Filament+	Pin 4-Filament-	
Pin 2-Plate	Cap -Grid	
Pin 3-Screen		

BOTTOM VIEW

AMPLIFIER (Class A)

Operating Conditions and Characteristics:

Filament	2.0	2.0	2.0	d-c volts
Plate	67.5	135	180 max.	volts
Screen	67.5	67.5	67.5	max. volts
Grid	-3	-3	-3	min. volts
Amp. Fact.	224	360	620	
Plate Res.	400000	600000	1000000	ohms
Mut. Cond.	560	600	620	μmhos
Mut. Cond. *	15	15	15	μmhos
Plate Cur.	2.7	2.8	2.8	ma.
Screen-Cur.	1.1	1.0	1.0	ma.

* At -22.5 volts bias.

MIXER


In Superheterodyne Circuits

Operating Conditions with Variable Bias:

Filament	2.0	2.0	2.0	d-c volts
Plate	67.5	135	180 max.	volts
Screen	67.5	67.5	67.5	max. volts
Grid	-5	-5	-5	approx. volts

The grid bias shown is minimum for an oscillator peak voltage of 4.0 volts. These values are optimum.

AVERAGE CHARACTERISTICS

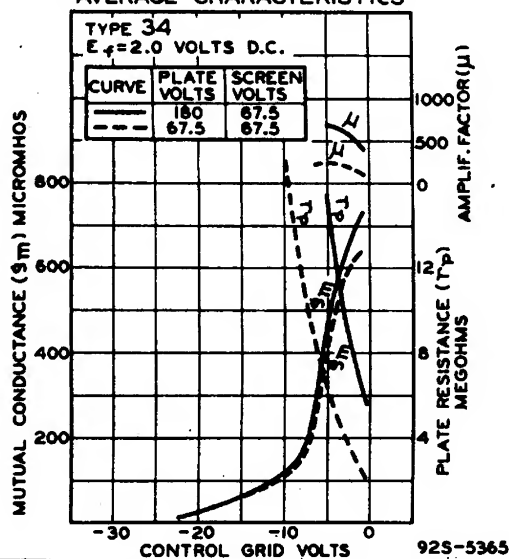


AUG. 20, 1935

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

DATA

AVERAGE PLATE CHARACTERISTICS

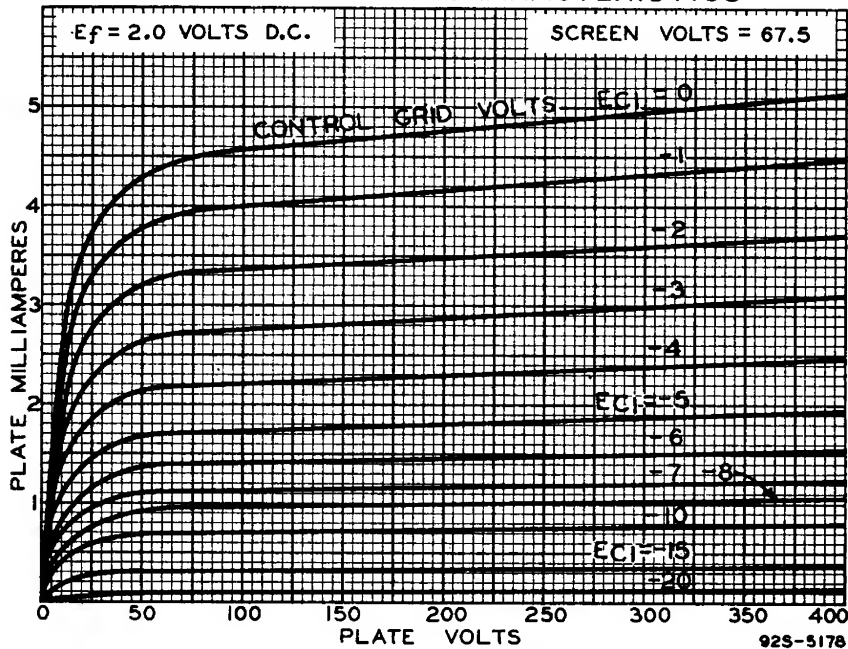

AVERAGE CHARACTERISTICS

